


CHEVRON R25

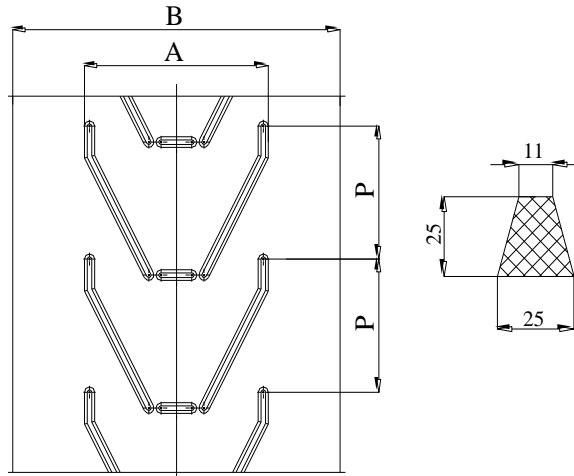


Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Type	B [mm]	A [mm]	P [mm]
Chevron R25/450	500	450	312,5
Chevron R25/450	550	450	312,5
Chevron R25/450	600	450	312,5
Chevron R25/450	650	450	312,5
Chevron R25/450	700	450	312,5
Chevron R25/450	750	450	312,5
Chevron R25/450	800	450	312,5
Chevron R25/750	800	750	451
Chevron R25/750	850	750	451
Chevron R25/750	900	750	451
Chevron R25/750	950	750	451
Chevron R25/750	1000	750	451
Chevron R25/750	1050	750	451
Chevron R25/750	1100	750	451
Chevron R25/750	1150	750	451
Chevron R25/750	1200	750	451
Chevron R25/750	1250	750	451
Chevron R25/750	1300	750	451
Chevron R25/750	1350	750	451
Chevron R25/750	1400	750	451
Chevron R25/750	1450	750	451
Chevron R25/750	1500	750	451
Chevron R25/750	1550	750	451
Chevron R25/750	1600	750	451

Characteristics of insertions

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	500 - 1600			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON R25

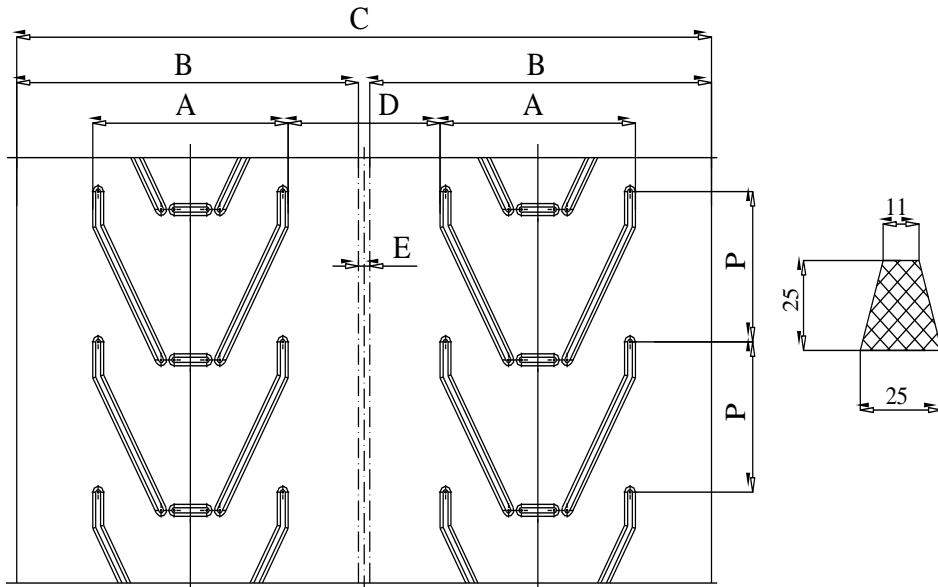


Type	C [mm]	B [mm]	A [mm]	P [mm]	D [mm]	E [mm]
Chevron R25/450	1250-1600	500	450	312,5	350	300
Chevron R25/450	1250-1600	550	450	312,5	350	250
Chevron R25/450	1250-1600	600	450	312,5	350	200
Chevron R25/450	1250-1600	650	450	312,5	350	150
Chevron R25/450	1250-1600	700	450	312,5	350	100
Chevron R25/450	1250-1600	750	450	312,5	350	50
Chevron R25/450	1250-1600	800	450	312,5	350	0

Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, % min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Characteristics of insertions

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	1250 - 1600			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON A33

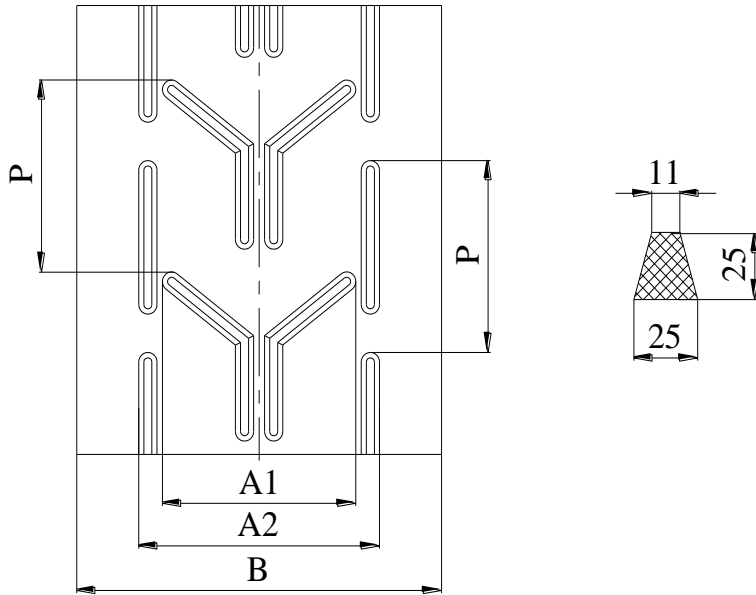


Type	B [mm]	A1 [mm]	A2 [mm]	P [mm]
Chevron A33 (R25/330)	400-750	265	330	250

Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Characteristics of insertions

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	400 - 750			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON A83

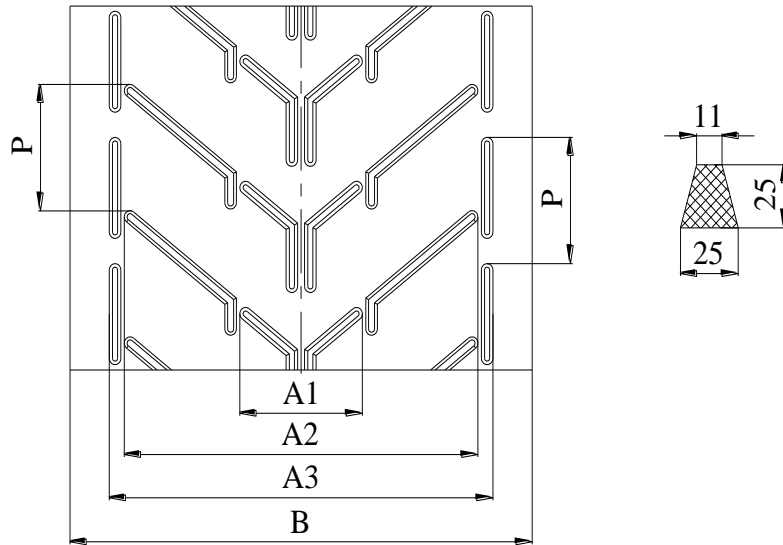


Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Characteristics of insertions

Type	B [mm]	A1 [mm]	A2 [mm]	A3 [mm]	P [mm]
Chevron A83 (R25/830)	900-1200	265	765	830	250

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	900 - 1200			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON A101

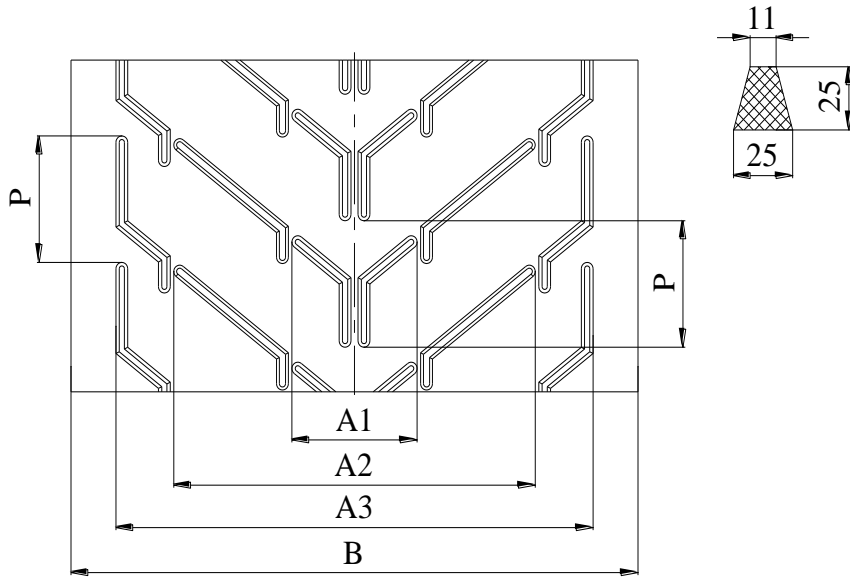


Type	B [mm]	A1 [mm]	A2 [mm]	A3 [mm]	P [mm]
Chevron A101 (R25/1010)	1100-1600	265	765	1010	250

Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Characteristics of insertions

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	1100 - 1600			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON A133

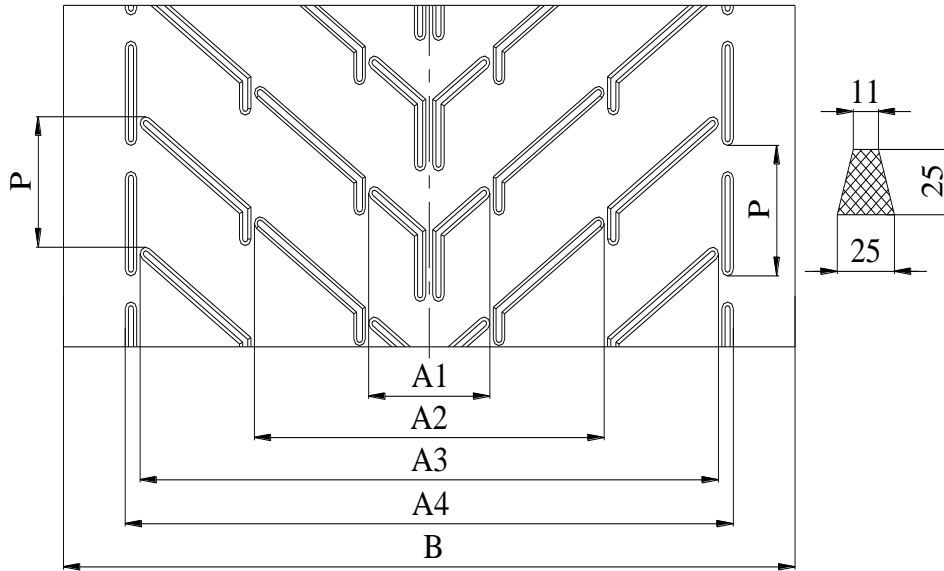


Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Characteristics of insertions

Type	B [mm]	A1 [mm]	A2 [mm]	A3 [mm]	A4 [mm]	P [mm]
Chevron A133 (R25/1330)	1400-1600	265	765	1265	1330	250

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kg/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	1400 - 1600			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON G25/550

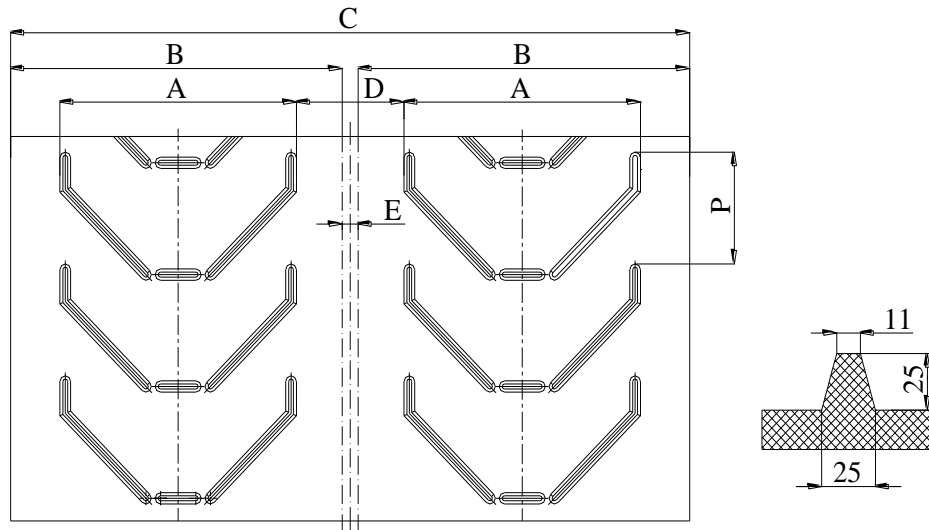


Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Type	C [mm]	B [mm]	A [mm]	P [mm]	D [mm]	E [mm]
Chevron G25/550	1400-1600	600	550	247	250	200
Chevron G25/550	1400-1600	650	550	247	250	150
Chevron G25/550	1400-1600	700	550	247	250	100
Chevron G25/550	1400-1600	750	550	247	250	50
Chevron G25/550	1400-1600	800	550	247	250	0

Characteristics of insertions

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	1400 - 1600			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON G25/550

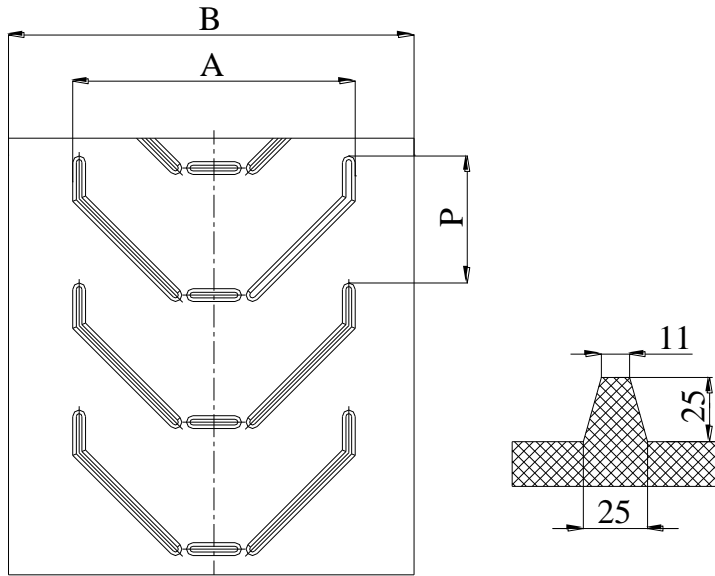


Type	B [mm]	A [mm]	P [mm]
Chevron G25/550	600-800	550	247

Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Characteristics of insertions

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	600 - 800			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12

CHEVRON G25/915

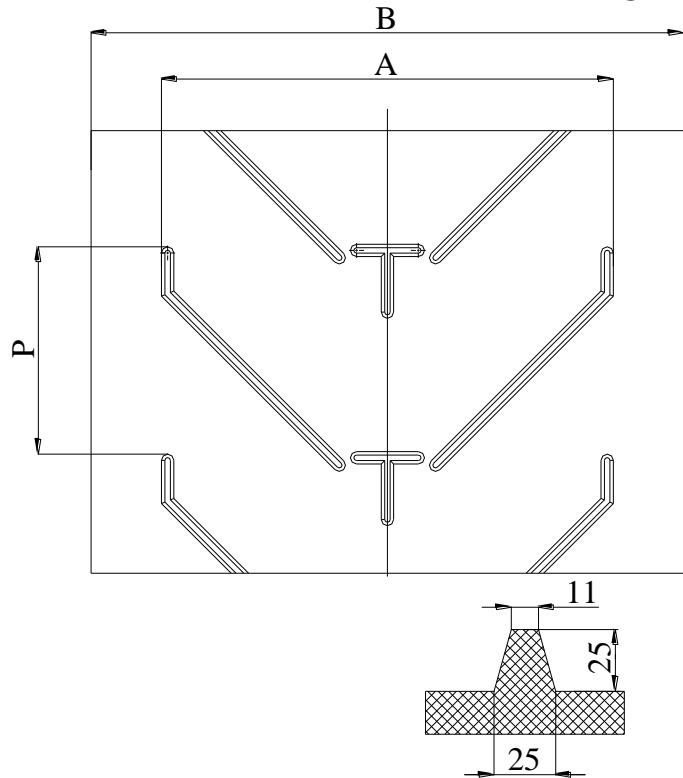

Type	B [mm]	A [mm]	P [mm]
Chevron G25/915	950-1600	915	420

Rubber mixture, properties for covers	General use				Resistance to temperature		Resistance to oil		
	w	x	y	z	T2	T3	MOR	G	ROS
Tensile strength, daN/cm ² , min	180	250	200	150	150	120	150	140	150
Elongation at break, %, min	400	450	400	70	450	350	350	350	350
Abrasion resistance (volume of wear), mm ³ , max	90	120	150	250	150	200	200	200	150
Resistant to oil	No	No	No	No	No	No	Medium	Good	Very good
Working temperature, °C [max]	70	70	70	70	120	150	70	80	100

Characteristics of insertions

Type of insertions	EP 80	EP 100	EP 125	EP 160
Insertions number	2 - 4			
Tensile strength, Kgf/cm, min	160 - 240	200 - 400	250 - 500	315 - 630
Width [mm]	950 - 1600			
Thickness [mm]	4 - 12	6 - 12	6 - 12	6 - 12