





In the loading area, **ARTE-PIPEBELT** is troughed like standard belts. After loading, special drums shape the belts into a pipe like structure with overlapped edges. Therefore the conveyed material is isolated in the pipe. Hexagonally positioned drums keep the belt closed along its path.

Near to the end of the conveyor the belts opens to a standard troughed belt supported by 3 drums and stays flat for the remaining path to the unloading zone. In return the belt closes again into a closed structure with overlapped edges.

**ARTE-PIPEBELT** belt is available in a wide range of cover grades: Y for general use conveying, W for very abrasive materials, G grade for conveying oily materials, temperature resistant for high temperature working conditions and flame resistant S and K grades.

We can offer other cover qualities on customer demand.

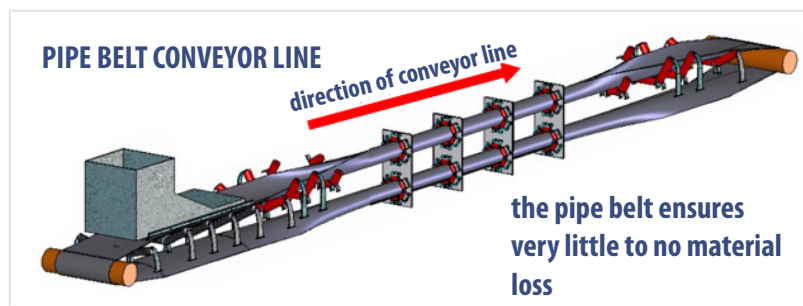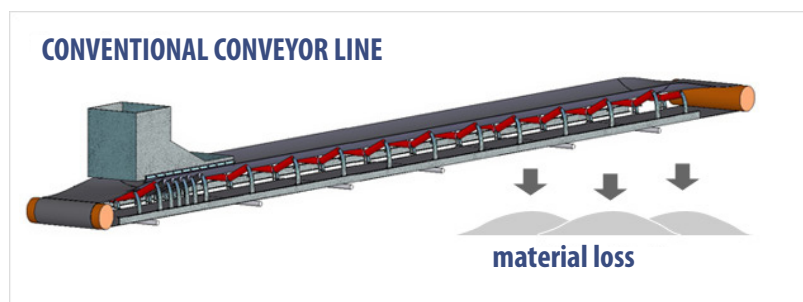

For more information, prices and technical support please visit our website at [www.artego.ro](http://www.artego.ro)

E-mail us at [export@artego.ro](mailto:export@artego.ro)

Phone: +40 253 226 160

Fax: +40 253 226 160