

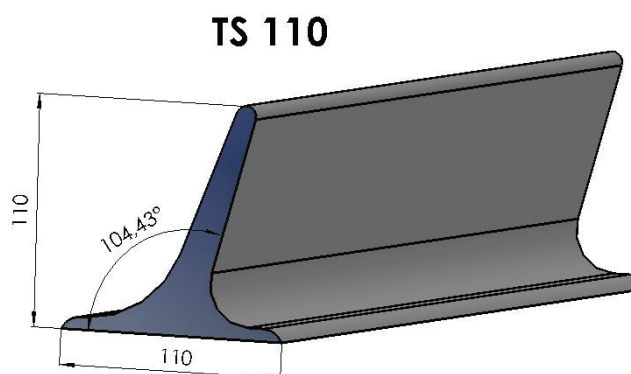
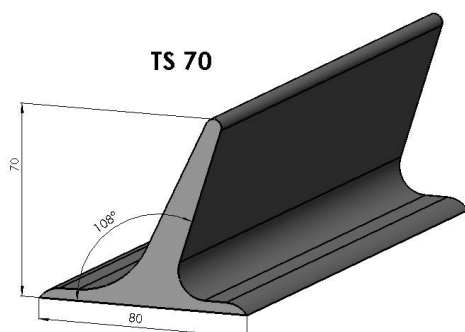
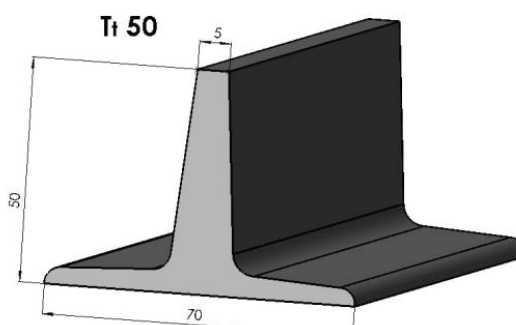
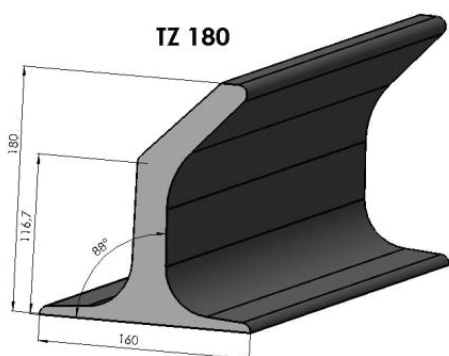
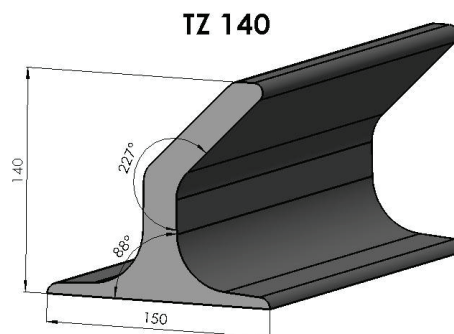


Rubber cleats for conveyor belts

The rubber cleats for conveyor belts are positioned between the lateral edges, transversal on the belt width, from 2 to 5 on a linear meter.

They are manufactured from natural rubber mixture without any metal or textile ply. The cleats are employed in temperatures ranging from -40°C to $+70^{\circ}\text{C}$ and have a good resistance in different environments.

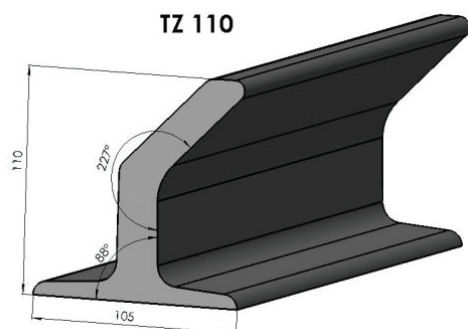

Tip	Tt50	Ts70	Ts110	Tz110	Tz140	Tz180	Tz220
H (mm)	50	70	110	110	140	180	220
B (mm)	70	80	110	105	150	160	140
S (mm)	8	10	12	20	15	20	20

For more information, prices and technical support please visit our website at www.artego.ro

E-mail us at export@artego.ro

Phone: +40 253 226 160

Fax: +40 253 226 160